


# AC 500

Cummins  
Mecc Alte  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$' z' \$z' D:

|         | "      | "      | "      | "      | Amp    |
|---------|--------|--------|--------|--------|--------|
| 400/230 | 500,00 | 400,00 | 455,00 | 364,00 | 656,00 |

fPQDE

GC ; ) &

) & z

fDF DE

%\$1

% %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

## TRANSFER SWITCH

# AC 500

Cummins  
Mecc Alte  
D+' &'

1

|                                      |        |                |       |       |
|--------------------------------------|--------|----------------|-------|-------|
| Manufacturer                         |        | Cummins        |       |       |
| Model                                |        | QSX 15 G6      |       |       |
|                                      |        | % \$\$\$ "# "  |       |       |
|                                      |        | () - \$\$\$ "  |       |       |
|                                      |        | 0% \$\$\$ < DQ |       |       |
|                                      | L      | 15,000         |       |       |
|                                      | "      | 137 x 169      |       |       |
|                                      |        | 17,0:1         |       |       |
|                                      | fl # 7 | "# "           | 1500  |       |
|                                      | fl 7   | L              | 91,00 |       |
|                                      |        | L              | 66,00 |       |
| AbsorbedAirDischargeReSourceKey.Text | ' # "  | 33,00          |       |       |
|                                      | ' # "  | 637,00         |       |       |
|                                      | ' # "  | 82,20          |       |       |
|                                      | ° C    | 515,00         |       |       |
|                                      |        | 24 V d.c.      |       |       |
|                                      | Load   | % \$\$i        | '+) i | ) \$i |
|                                      | # "    | 95,90          | 74,30 | 51,30 |

2

|      |      |           |  |  |
|------|------|-----------|--|--|
|      |      | Mecc Alte |  |  |
|      |      | ECO 40-3S |  |  |
|      | Hz   | 50        |  |  |
|      | "    | 500,00    |  |  |
| 7cg' |      | 0,80      |  |  |
|      |      | 3         |  |  |
|      | fl 7 | 400/230   |  |  |
|      | A    | 721,00    |  |  |


3

|        |         | fl 7    |         | fl 7    |        |
|--------|---------|---------|---------|---------|--------|
|        | "       | "       | "       | "       | L      |
| AC 500 | 3815,00 | 3407,00 | 1550,00 | 2103,00 | 850,00 |
|        |         | fl 7    |         | fl 7    |        |
|        | "       | "       | "       | "       | L      |
| MS 80  | 4815    | 4810    | 1606    | 2615    | 850    |

# AC 500

Cummins  
Mecc Alte  
D+' &'

## 1 D+' &'

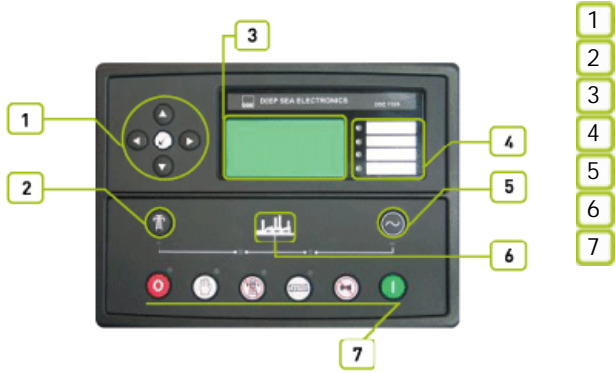

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ ž fI  
 &&\$ ž  
 "8G9+' &\$ ž  
 "8G9+' &\$ ž  
 " ž  
 % &1 \*(' ž  
 " ž  
 žFG&' &žFG(,) ž  
 " ž

# AC 500

Cummins  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)

ž

ž

ž

ž

# AC 500

Cummins  
Mecc Alte  
D+ & "



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

|       |   |      |
|-------|---|------|
|       | " | 1606 |
| fl "L | " | 4810 |
| fl "L | " | 2615 |
|       | L | 850  |