

APD 2250 M

Mitsubishi

D+ &



ISO8528

GC ,) &

CE

2000/14/EC

&\$\$\$#/(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	2250,00	1800,00	2000,00	1600,00	2890,00

fPGDE

=GC ,) &

,) & z

fDF D

%\$!

%

%&

=GC "

\$(**

z&(

=GC

Standard Specifications

z

fl

E

z

1

TRANSFER SWITCH

APD 2250 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S16R-PTAA2
		% \$ \$ ' "# "
		% ' - Z \$ \$ ' "
		Q) - - Z \$ \$ < DQ
	L	65,370
	"	170x180
		13,5:1
	fl # 7	"# " 1500
	fl 7	L 230,00
		L 400,00
AbsorbedAirDischargeReSourceKey.Text	' # "	159,00
	' # "	2500,00
	° C	420,00
		24 V d.c.
	Load	% \$ \$ 1
	# "	
		414,30

		ECO46-1L/4
	Hz	50
	"	2100,00
7cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 2250 M	15500,00	5700,00	2300,00	3300,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 99	21100	9000	2800	3300/4800	2200

D+' &'

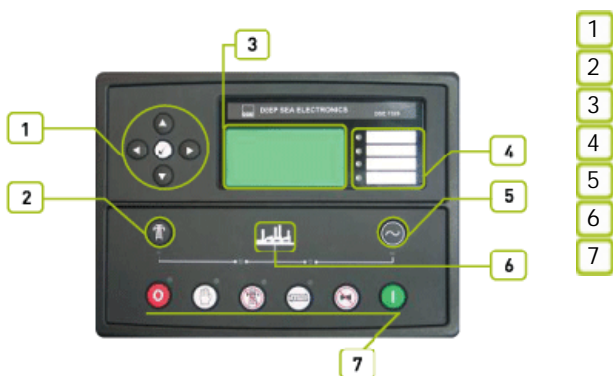

APD 2250 M

Mitsubishi

D+' &'

1

'8G9ž '+' &\$ž
) 5ž&&\$#&(\$

2

3

4

'8G9+' &\$
&&\$ ž

fl

"'8G9+' &\$

'8G9+' &\$

ž

% &l '* (

žFG&' &žFG(,) ž

ž

APD 2250 M

Mitsubishi

D+' &'

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž


ž

APD 2250 M

Mitsubishi

D+ &''

5? -- !'

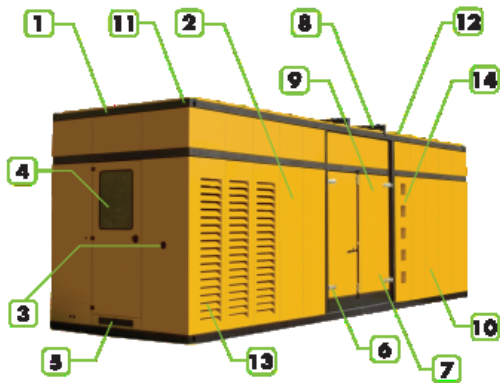

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200